



**CD**

**CL12/0B-00A**

**Connect.M12-F-Axial,4 p,Field attach.**

# TECHNICAL FEATURES

## Application

|        |                 |
|--------|-----------------|
| Fixing | screw terminals |
|--------|-----------------|

## Electrical data

|                       |                           |
|-----------------------|---------------------------|
| Rated current         | 4 A                       |
| Led                   | no                        |
| Wires                 | 4                         |
| Insulation resistance | $\geq 100\text{ m}\Omega$ |
| Contact resistance    | $\leq 5\text{ m}\Omega$   |
| Rated voltage         | 250 V                     |

## Mechanical data

|             |                  |
|-------------|------------------|
| Connections | Field attachable |
|-------------|------------------|

|                                |                  |
|--------------------------------|------------------|
| Operating temperature          | -25 °C ... 90 °C |
| Head type                      | Axial            |
| Plug                           | M12              |
| Outer diameter                 | 3 mm ... 6,5 mm  |
| Stripping lenght of the sheath | 20 mm            |
| Conductors section             | 4                |
| Model                          | Female           |

Test/Approvals


|                      |      |
|----------------------|------|
| Degree of protection | IP67 |
|----------------------|------|

Generical Data

|                       |                  |
|-----------------------|------------------|
| Operating Temperature | -25 °C ... 90 °C |
| Mechanical Protection | IP67             |

OTHERS

Dimensions

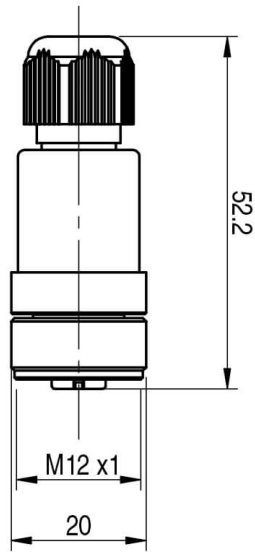

**Datasensing  
S.r.l.**

Strada S.Caterina, 235  
41122 Modena (MO)  
Tel. 059 420411  
Fax 059 253973  
E-mail  
[info@datasensing.com](mailto:info@datasensing.com)

**date of  
printing**

25/10/2026  
03:58:26