




Lexmark Product Configuration Guide



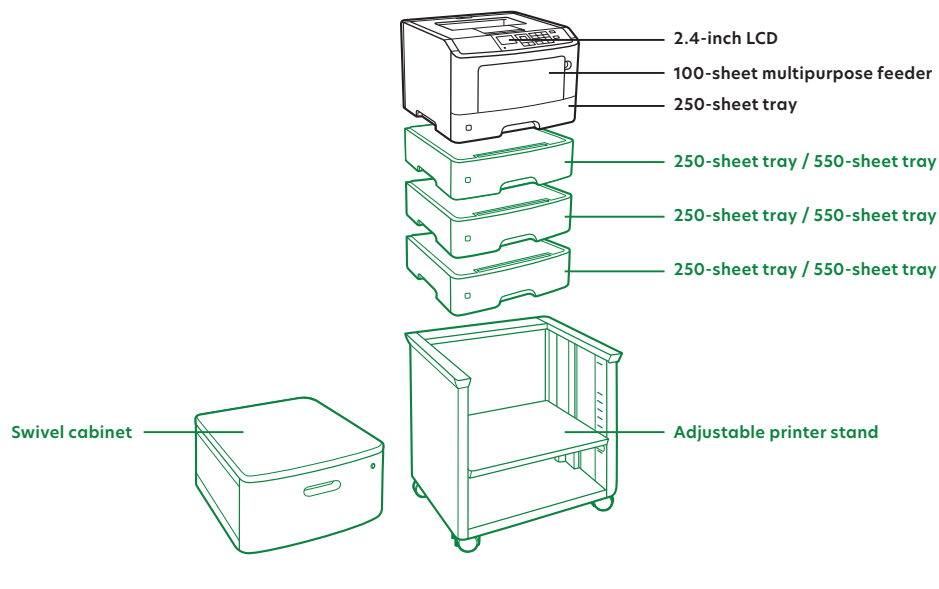

Lexmark M1145 monochrome laser printer


Size (in. - H x W x D) / Weight (lb.)	10.3 x 15.7 x 15.0 in. / 33.1 lb.
250-sheet tray:	
Size (in. - H x W x D)	3.03 x 15.3 x 15.04 in.
Packaged size (in. - H x W x D)	6.4 x 18.4 x 16.9 in.
Weight (lb.)	9.2 lb.
Packaged weight (lb.)	10.85 lb.
550-sheet tray:	
Size (in. - H x W x D)	4.29 x 15.3 x 15.04 in.
Packaged size (in. - H x W x D)	7.6 x 18.4 x 16.9 in.
Weight (lb.)	9.2 lb.
Packaged weight (lb.)	12.15 lb.
Adjustable printer stand:	
Size (in. - H x W x D)	23 x 23.5 x 23.5 in.
Packaged size (in. - H x W x D)	31.75 x 27.0 x 27.0 in.
Weight (lb.)	55 lb.
Packaged weight (lb.)	81 lb.
Swivel cabinet:	
Size (in. - H x W x D)	10.4 x 18.7 x 23.6 in.
Packaged size (in. - H x W x D)	14.50 x 27.25 x 23.25 in.
Weight (lb.)	48.0 lb.
Packaged weight (lb.)	57 lb.

Description	Part number
Base model	35S0040
250-sheet tray	35S0267
550-sheet tray	35S0567
Adjustable printer stand	35S8502
Swivel cabinet	3073173
Toner cartridge	24B6035
Imaging kit	24B6040
550-sheet lockable tray	35S0367

Notes :

- ▶ Input capacity
Standard: 350 sheets
Maximum: 2,000 sheets
- ▶ Output capacity
Standard: 150 sheets
Maximum: 150 sheets
- ▶ Cabinet and stand are optional
- ▶ There is no hard disk
- ▶ Maximum yield of cartridge that comes with the printer:
6K pages
- ▶ Maximum yield of after-market cartridge: 16K pages

550-sheet lockable tray: This optional input source includes a built-in lock to protect costly or sensitive media, such as prescription receipts, teller checks and letterhead.

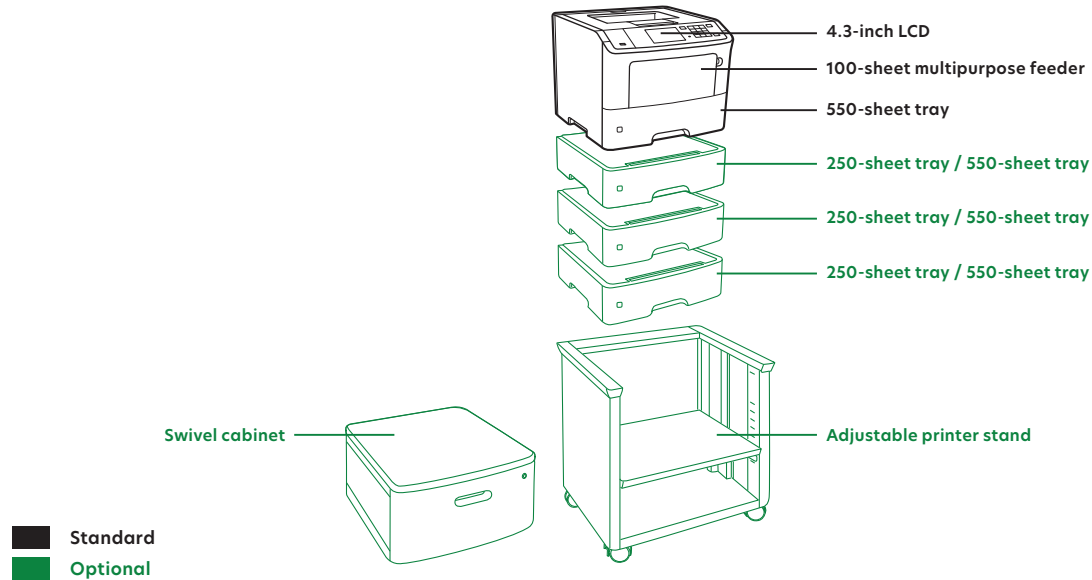

Lexmark M3150 monochrome laser printer



Size (in. - H x W x D) / Weight (lb.)	12.1 x 15.7 x 15.6 in. / 35.7lb.
250-sheet tray:	
Size (in. - H x W x D)	3.03 x 15.3 x 15.04 in.
Packaged size (in. - H x W x D)	6.4 x 18.4 x 16.9 in.
Weight (lb.)	9.2 lb.
Packaged weight (lb.)	10.85 lb.
550-sheet tray:	
Size (in. - H x W x D)	4.29 x 15.3 x 15.04 in.
Packaged size (in. - H x W x D)	7.6 x 18.4 x 16.9 in.
Weight (lb.)	9.2 lb.
Packaged weight (lb.)	12.15 lb.
Adjustable printer stand:	
Size (in. - H x W x D)	23 x 23.5 x 23.5 in.
Packaged size (in. - H x W x D)	31.75 x 27.0 x 27.0 in.
Weight (lb.)	55 lb.
Packaged weight (lb.)	81 lb.
Swivel cabinet:	
Size (in. - H x W x D)	10.4 x 18.7 x 23.6 in.
Packaged size (in. - H x W x D)	14.50 x 27.25 x 23.25 in.
Weight (lb.)	48.0 lb.
Packaged weight (lb.)	57 lb.

Description	Part number
Base model	35S0041
250-sheet tray	35S0267
550-sheet tray	35S0567
Adjustable printer stand	35S8502
Swivel cabinet	3073173
Toner cartridge	24B6168
Imaging kit	24B6040
550-sheet lockable tray	35S0367

Notes :

- ▶ Input capacity
Standard: 650 sheets
Maximum: 2,300 sheets
- ▶ Output capacity
Standard: 250 sheets
Maximum: 250 sheets
- ▶ Cabinet and stand are optional
- ▶ The hard disk is optional
- ▶ Maximum yield of cartridge that comes with the printer:
6K pages
- ▶ Maximum yield of after-market cartridge: 16K pages

550-sheet lockable tray: This optional input source includes a built-in lock to protect costly or sensitive media, such as prescription receipts, teller checks and letterhead.

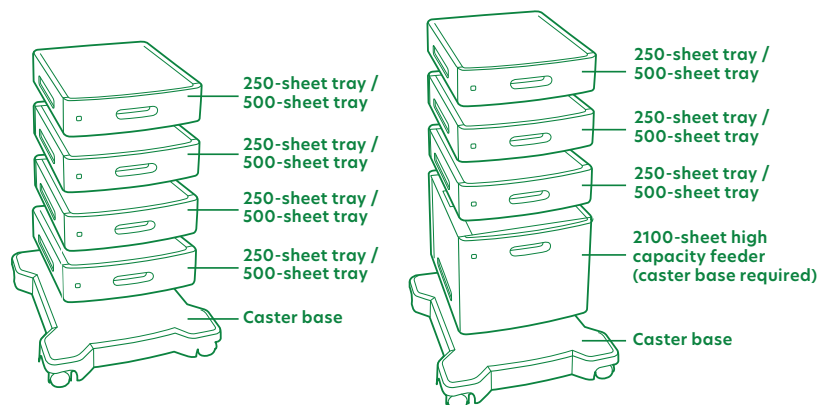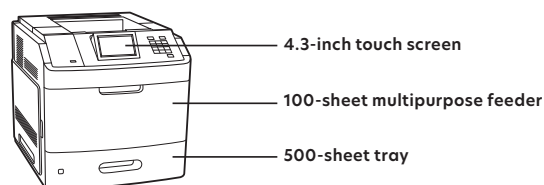

High-capacity output extender



Up to 3 4-bin mailboxes



Up to 3 output expanders



Staple/hole punch finisher



Staple finisher



Output expander



4-bin mailbox



Output expander



High-capacity output extender



Output expander

Lexmark M5155, M5163 monochrome laser printer

Size (in. - H x W x D) / Weight (lb.)	16.3 x 16.7 x 20.1 in. / 52.2 lb.
250-sheet lockable tray:	
Size (in. - H x W x D)	3.1 x 16.6 x 20.1 in.
Packaged size (in. - H x W x D)	6.3 x 19.2 x 22.8 in.
Weight (lb.)	11.5 lb.
Packaged weight (lb.)	13.5 lb.
250-sheet tray:	
Size (in. - H x W x D)	3.1 x 16.6 x 20.1 in.
Packaged size (in. - H x W x D)	6.3 x 19.2 x 22.8 in.
Weight (lb.)	11.0 lb.
Packaged weight (lb.)	13.5 lb.
4.3 in. (11 cm) spacer	
Size (in. - H x W x D)	4.3 x 16.6 x 20.1 in.
Packaged size (in. - H x W x D)	8.1 x 23.1 x 19.4 in.
Weight (lb.)	12.8 lb.
Packaged weight (lb.)	16.1 lb.
Caster base:	
Size (in. - H x W x D)	4.2 x 23.4 x 27.3 in.
Packaged size (in. - H x W x D)	9.0 x 34.0 x 35.0 in.
Weight (lb.)	54.0 lb.
Packaged weight (lb.)	63.1 lb.
Swivel cabinet:	
Size (in. - H x W x D)	10.4 x 18.7 x 23.6 in.
Packaged size (in. - H x W x D)	14.50 x 27.25 x 23.25 in.
Weight (lb.)	48.0 lb.
Packaged weight (lb.)	57 lb.



Description	Part number
M3150 base model	40G0720
M5163 base model	40G0730
250-sheet tray	40G0800
250-sheet tray insert	40G0801
250-sheet lockable tray	40G0820
550-sheet tray	40G0802
550-sheet tray insert	40G0803
550-sheet lockable tray	40G0822
2100-sheet tray	40G0804
Staple finisher	40G0850
4-bin mailbox	40G0852
Output expander	40G0851
High-capacity output expander	40G0853
Spacer	40G0854
Caster base	40G0855
Swivel cabinet	3073173
Staple, hole punch finisher	40G0849
Staple cartridges (3 pack)	25A0013
Toner cartridge	24B6015
Imaging unit	24B6025

Notes :

- ▶ Input capacity
Standard: 650 sheets
Maximum: 4,400 sheets
- ▶ Output capacity
Standard: 550 sheets
Maximum: 2,550 sheets
- ▶ Caster base or cabinet is required



The staple, hole punch finisher for select Lexmark monochrome models is an expanded version of the staple finisher. The staple, hole punch finisher includes all of the functionality of the staple finisher and adds the ability to apply a standard left page edge U.S. 3-hole pattern or European 2-hole or 4-hole pattern to all supported media (A4, Letter, Oficio and Folio).

Configuration Guide

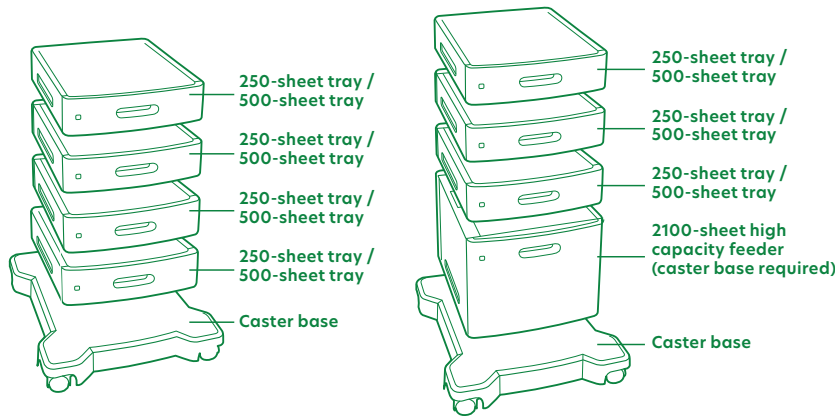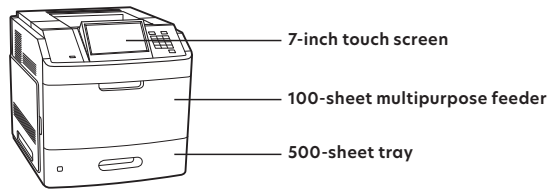

Standard

Optional



Lexmark M5170 monochrome laser printer

Size (in. - H x W x D) / Weight (lb.)	16.3 x 16.7 x 20.1 in. / 52.9 lb.
250-sheet lockable tray:	
Size (in. - H x W x D)	3.1 x 16.6 x 20.1 in.
Packaged size (in. - H x W x D)	6.3 x 19.2 x 22.8 in.
Weight (lb.)	11.5 lb.
Packaged weight (lb.)	13.5 lb.
250-sheet tray:	
Size (in. - H x W x D)	3.1 x 16.6 x 20.1 in.
Packaged size (in. - H x W x D)	6.3 x 19.2 x 22.8 in.
Weight (lb.)	11.0 lb.
Packaged weight (lb.)	13.5 lb.
4.3 in. (11 cm) spacer	
Size (in. - H x W x D)	4.3 x 16.6 x 20.1 in.
Packaged size (in. - H x W x D)	8.1 x 23.1 x 19.4 in.
Weight (lb.)	12.8 lb.
Packaged weight (lb.)	16.1 lb.
Caster base:	
Size (in. - H x W x D)	4.2 x 23.4 x 27.3 in.
Packaged size (in. - H x W x D)	9.0 x 34.0 x 35.0 in.
Weight (lb.)	54.0 lb.
Packaged weight (lb.)	63.1 lb.
Swivel cabinet:	
Size (in. - H x W x D)	10.4 x 18.7 x 23.6 in.
Packaged size (in. - H x W x D)	14.50 x 27.25 x 23.25 in.
Weight (lb.)	48.0 lb.
Packaged weight (lb.)	57 lb.

Description	Part number
Base model	40G0740
250-sheet tray	40G0800
250-sheet tray insert	40G0801
250-sheet lockable tray	40G0820
550-sheet tray	40G0802
550-sheet tray insert	40G0803
550-sheet lockable tray	40G0822
2100-sheet tray	40G0804
Staple finisher	40G0850
4-bin mailbox	40G0852
Output expander	40G0851
High-capacity output expander	40G0853
Spacer	40G0854
Caster base	40G0855
Swivel cabinet	3073173
Staple, hole punch finisher	40G0849
Staple cartridges (3 pack)	25A0013
Toner cartridge	24B6015
Imaging unit	24B6025


Notes :

- ▶ Input capacity
Standard: 650 sheets
Maximum: 4,400 sheets
- ▶ Output capacity
Standard: 550 sheets
Maximum: 2,550 sheets
- ▶ Caster base or cabinet is required

The staple, hole punch finisher for select Lexmark monochrome models is an expanded version of the staple finisher. The staple, hole punch finisher includes all of the functionality of the staple finisher and adds the ability to apply a standard left page edge U.S. 3-hole pattern or European 2-hole or 4-hole pattern to all supported media (A4, Letter, Oficio and Folio).



partnet.lexmark.com

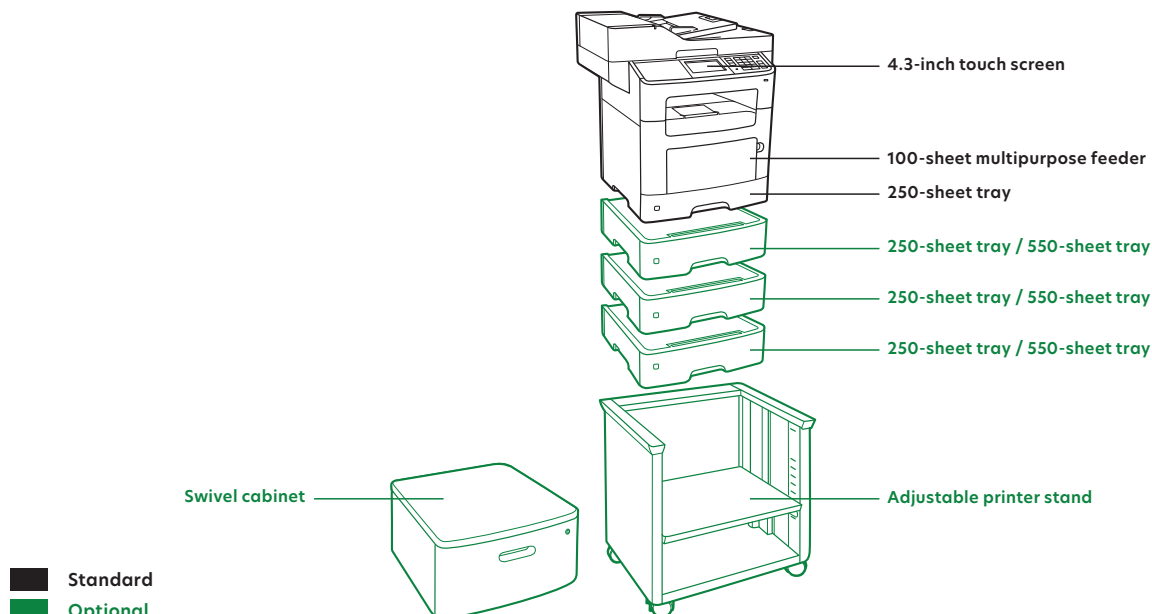

Lexmark XM1145 monochrome multifunction printer


Size (in. - H x W x D) / Weight (lb.)	19.8 x 19.3 x 17.8 in. / 48 lb.
250-sheet tray:	
Size (in. - H x W x D)	3.03 x 15.3 x 15.04 in.
Packaged size (in. - H x W x D)	6.4 x 18.4 x 16.9 in.
Weight (lb.)	9.2 lb.
Packaged weight (lb.)	10.85 lb.
550-sheet tray:	
Size (in. - H x W x D)	4.29 x 15.3 x 15.04 in.
Packaged size (in. - H x W x D)	7.6 x 18.4 x 16.9 in.
Weight (lb.)	9.2 lb.
Packaged weight (lb.)	12.15 lb.
Adjustable printer stand:	
Size (in. - H x W x D)	23 x 23.5 x 23.5 in.
Packaged size (in. - H x W x D)	31.75 x 27.0 x 27.0 in.
Weight (lb.)	55 lb.
Packaged weight (lb.)	81 lb.
Swivel cabinet:	
Size (in. - H x W x D)	10.4 x 18.7 x 23.6 in.
Packaged size (in. - H x W x D)	14.50 x 27.25 x 23.25 in.
Weight (lb.)	48.0 lb.
Packaged weight (lb.)	57 lb.

Description	Part number
Base model	35S5705
250-sheet tray	35S0267
550-sheet tray	35S0567
Adjustable printer stand	35S8502
Swivel cabinet	3073173
Toner cartridge	24B6035
Imaging kit	24B6040
550-sheet lockable tray	35S0367

Notes :

- ▶ Input capacity
Standard: 350 sheets
Maximum: 2,000 sheets
- ▶ Output capacity
Standard: 150 sheets
Maximum: 150 sheets
- ▶ Cabinet and stand are optional
- ▶ The hard disk is optional
- ▶ Maximum yield of cartridge that comes with the printer:
5K pages
- ▶ Maximum yield of after-market cartridge: 16K pages

550-sheet lockable tray: This optional input source includes a built-in lock to protect costly or sensitive media, such as prescription receipts, teller checks and letterhead.

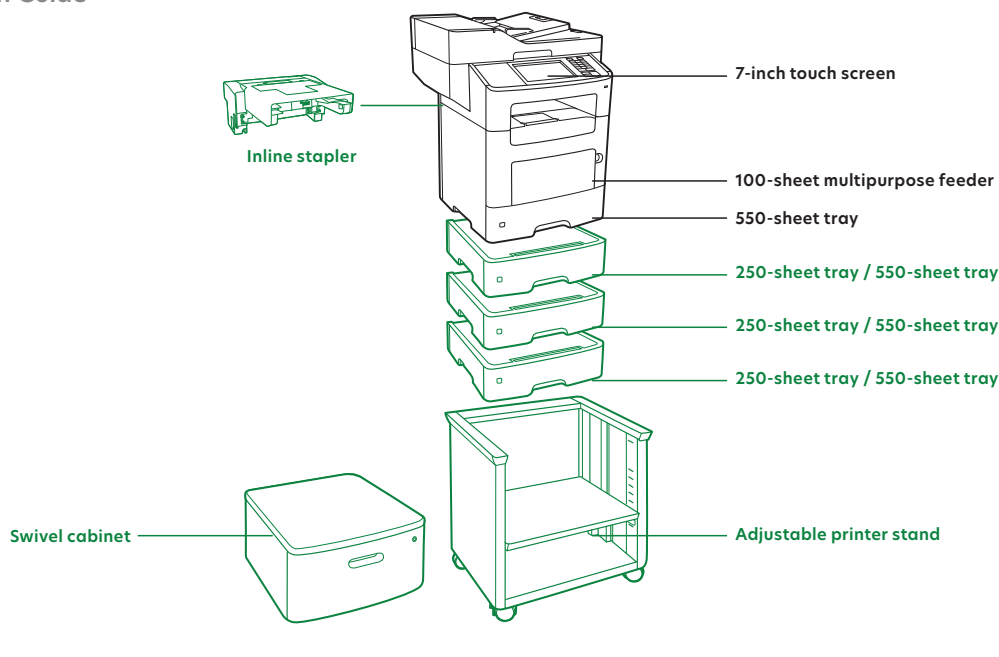

Lexmark XM3150 monochrome multifunction printer



Size (in. - H x W x D) / Weight (lb.)	22.1 x 19.3 x 18.9 in. / 52 lb.
250-sheet tray:	
Size (in. - H x W x D)	3.03 x 15.3 x 15.04 in.
Packaged size (in. - H x W x D)	6.4 x 18.4 x 16.9 in.
Weight (lb.)	9.2 lb.
Packaged weight (lb.)	10.85 lb.
550-sheet tray:	
Size (in. - H x W x D)	4.29 x 15.3 x 15.04 in.
Packaged size (in. - H x W x D)	7.6 x 18.4 x 16.9 in.
Weight (lb.)	9.2 lb.
Packaged weight (lb.)	12.15 lb.
Inline stapler:	
Size (in. - H x W x D)	7.7 x 16.1 x 14.6 in.
Packaged size (in. - H x W x D)	12.48 x 18.43 x 19.29 in.
Weight (lb.)	11.6 lb.
Packaged weight (lb.)	14.8 lb.
Adjustable printer stand:	
Size (in. - H x W x D)	23 x 23.5 x 23.5 in.
Packaged size (in. - H x W x D)	31.75 x 27.0 x 27.0 in.
Weight (lb.)	55 lb.
Packaged weight (lb.)	81 lb.
Swivel cabinet:	
Size (in. - H x W x D)	10.4 x 18.7 x 23.6 in.
Packaged size (in. - H x W x D)	14.50 x 27.25 x 23.25 in.
Weight (lb.)	48.0 lb.
Packaged weight (lb.)	57 lb.

Description	Part number
Base model	35S6830
250-sheet tray	35S0267
550-sheet tray	35S0567
Inline stapler	35S8000
Adjustable printer stand	35S8502
Swivel cabinet	3073173
Toner cartridge	24B6186
Imaging kit	24B6040
Staple cartridge (5-pack)	35S8500
550-sheet lockable tray	35S0367

Notes :

- ▶ Input capacity
Standard: 650 sheets
Maximum: 2,300 sheets
- ▶ Output capacity
Standard: 250 sheets
Maximum: 250 sheets
- ▶ Cabinet and stand are optional
- ▶ The hard disk is optional
- ▶ Maximum yield of cartridge that comes with the printer:
7.5K pages
- ▶ Maximum yield of after-market cartridge: 16K pages
- ▶ ADF Capacity: 50 pages
- ▶ Optional Inline Stapler Cartridge: 1000 staples
 - ▶ Staples 2-20 sheets per set
 - ▶ Refill staple cartridges available in packages of 5 cartridges

550-sheet lockable tray: This optional input source includes a built-in lock to protect costly or sensitive media, such as prescription receipts, teller checks and letterhead.

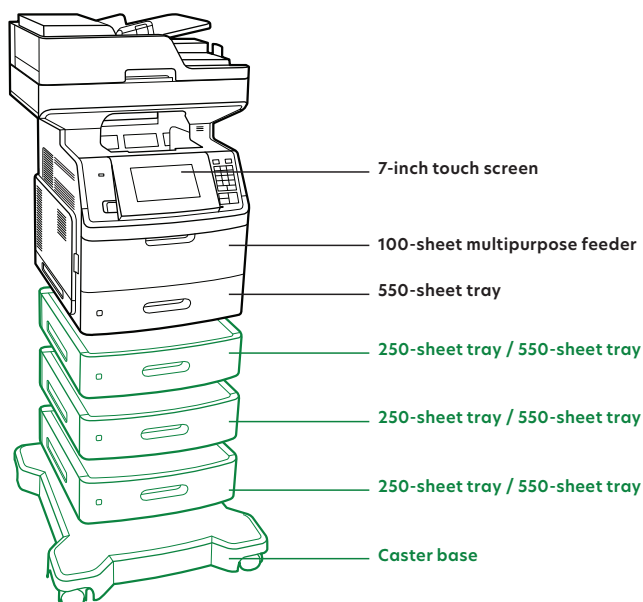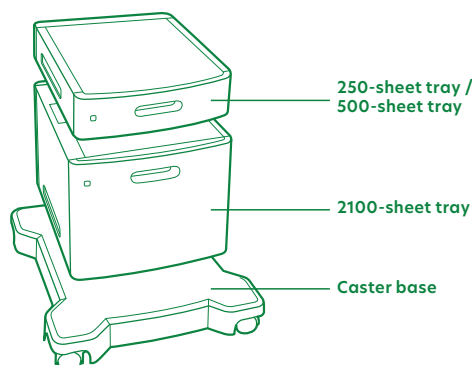

Standard
Optional



Lexmark XM5263 monochrome multifunction printer

Size (in. - H x W x D) / Weight (lb.)	28.6 x 21.6 x 22.8 in. / 95.4 lb.
250-sheet lockable tray:	
Size (in. - H x W x D)	3.1 x 16.6 x 20.1 in.
Packaged size (in. - H x W x D)	6.3 x 19.2 x 22.8 in.
Weight (lb.)	11.5 lb.
Packaged weight (lb.)	13.5 lb.
250-sheet tray:	
Size (in. - H x W x D)	3.1 x 16.6 x 20.1 in.
Packaged size (in. - H x W x D)	6.3 x 19.2 x 22.8 in.
Weight (lb.)	11.0 lb.
Packaged weight (lb.)	13.5 lb.
4.3 in. (11 cm) spacer	
Size (in. - H x W x D)	4.3 x 16.6 x 20.1 in.
Packaged size (in. - H x W x D)	8.1 x 23.1 x 19.4 in.
Weight (lb.)	12.8 lb.
Packaged weight (lb.)	16.1 lb.
Caster base:	
Size (in. - H x W x D)	4.2 x 23.4 x 27.3 in.
Packaged size (in. - H x W x D)	9.0 x 34.0 x 35.0 in.
Weight (lb.)	54.0 lb.
Packaged weight (lb.)	63.1 lb.
Swivel cabinet:	
Size (in. - H x W x D)	10.4 x 18.7 x 23.6 in.
Packaged size (in. - H x W x D)	14.50 x 27.25 x 23.25 in.
Weight (lb.)	48.0 lb.
Packaged weight (lb.)	57 lb.

Description	Part number
Base model	24T9400
250-sheet tray	40G0800
250-sheet tray insert	40G0801
250-sheet lockable tray	40G0820
550-sheet tray	40G0802
550-sheet tray insert	40G0803
550-sheet lockable tray	40G0822
2100-sheet tray	40G0804
Spacer	40G0854
Caster base	40G0855
Swivel cabinet	3073173
Toner cartridge	24B6015
Imaging kit	24B6025

Notes :

- ▶ Input capacity
Standard: 650 sheets
Maximum: 3,300 sheets
- ▶ Output capacity
Standard: 550 sheets
Maximum: 550 sheets
- ▶ Caster base or cabinet is required
- ▶ The hard disk is optional
- ▶ DADF - Duplexing Automatic Document Feeder (scans both sides of paper in one pass)
- ▶ Maximum yield of cartridge that comes with the printer:
10K pages
- ▶ Maximum yield of after-market cartridge: 35K pages

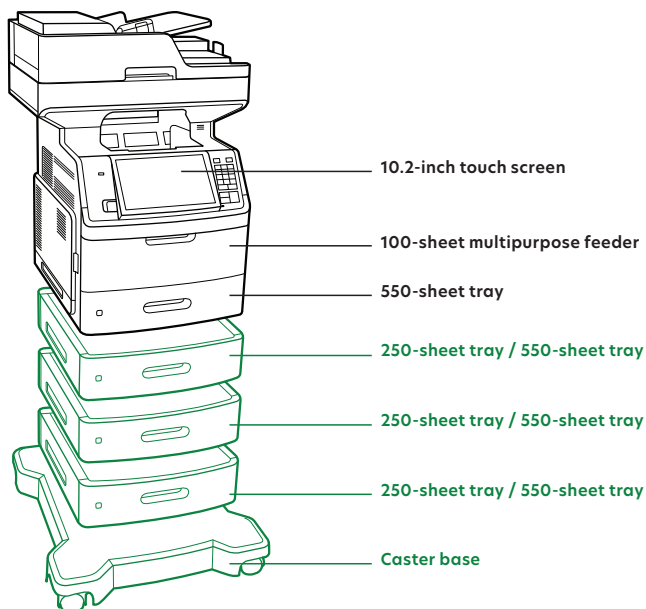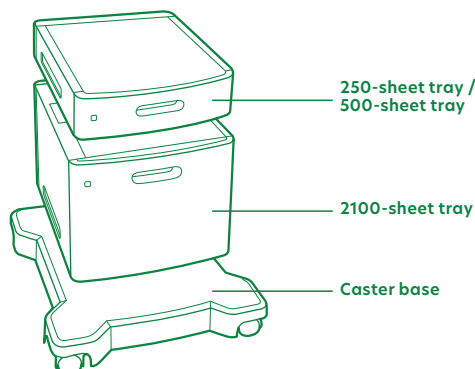

■ Standard
■ Optional


Lexmark XM5270 monochrome multifunction printer

Size (in. - H x W x D) / Weight (lb.)	28.6 x 21.6 x 22.8 in. / 95.4 lb.
250-sheet lockable tray:	
Size (in. - H x W x D)	3.1 x 16.6 x 20.1 in.
Packaged size (in. - H x W x D)	6.3 x 19.2 x 22.8 in.
Weight (lb.)	11.5 lb.
Packaged weight (lb.)	13.5 lb.
250-sheet tray:	
Size (in. - H x W x D)	3.1 x 16.6 x 20.1 in.
Packaged size (in. - H x W x D)	6.3 x 19.2 x 22.8 in.
Weight (lb.)	11.0 lb.
Packaged weight (lb.)	13.5 lb.
4.3 in. (11 cm) spacer	
Size (in. - H x W x D)	4.3 x 16.6 x 20.1 in.
Packaged size (in. - H x W x D)	8.1 x 23.1 x 19.4 in.
Weight (lb.)	12.8 lb.
Packaged weight (lb.)	16.1 lb.
Caster base:	
Size (in. - H x W x D)	4.2 x 23.4 x 27.3 in.
Packaged size (in. - H x W x D)	9.0 x 34.0 x 35.0 in.
Weight (lb.)	54.0 lb.
Packaged weight (lb.)	63.1 lb.
Swivel cabinet:	
Size (in. - H x W x D)	10.4 x 18.7 x 23.6 in.
Packaged size (in. - H x W x D)	14.50 x 27.25 x 23.25 in.
Weight (lb.)	48.0 lb.
Packaged weight (lb.)	57 lb.

Description	Part number
Base model	24T9401
250-sheet tray	40G0800
250-sheet tray insert	40G0801
250-sheet lockable tray	40G0820
550-sheet tray	40G0802
550-sheet tray insert	40G0803
550-sheet lockable tray	40G0822
2100-sheet tray	40G0804
Spacer	40G0854
Caster base	40G0855
Swivel cabinet	3073173
Toner cartridge	24B6015
Imaging kit	24B6025

Notes :

- ▶ Input capacity
Standard: 650 sheets
Maximum: 3,300 sheets
- ▶ Output capacity
Standard: 550 sheets
Maximum: 550 sheets
- ▶ Caster base or cabinet is required
- ▶ Hard disk included in standard configuration
- ▶ DADF - Duplexing Automatic Document Feeder (scans both sides of paper in one pass)
- ▶ Maximum yield of cartridge that comes with the printer: 10K pages
- ▶ Maximum yield of after-market cartridge: 35K pages

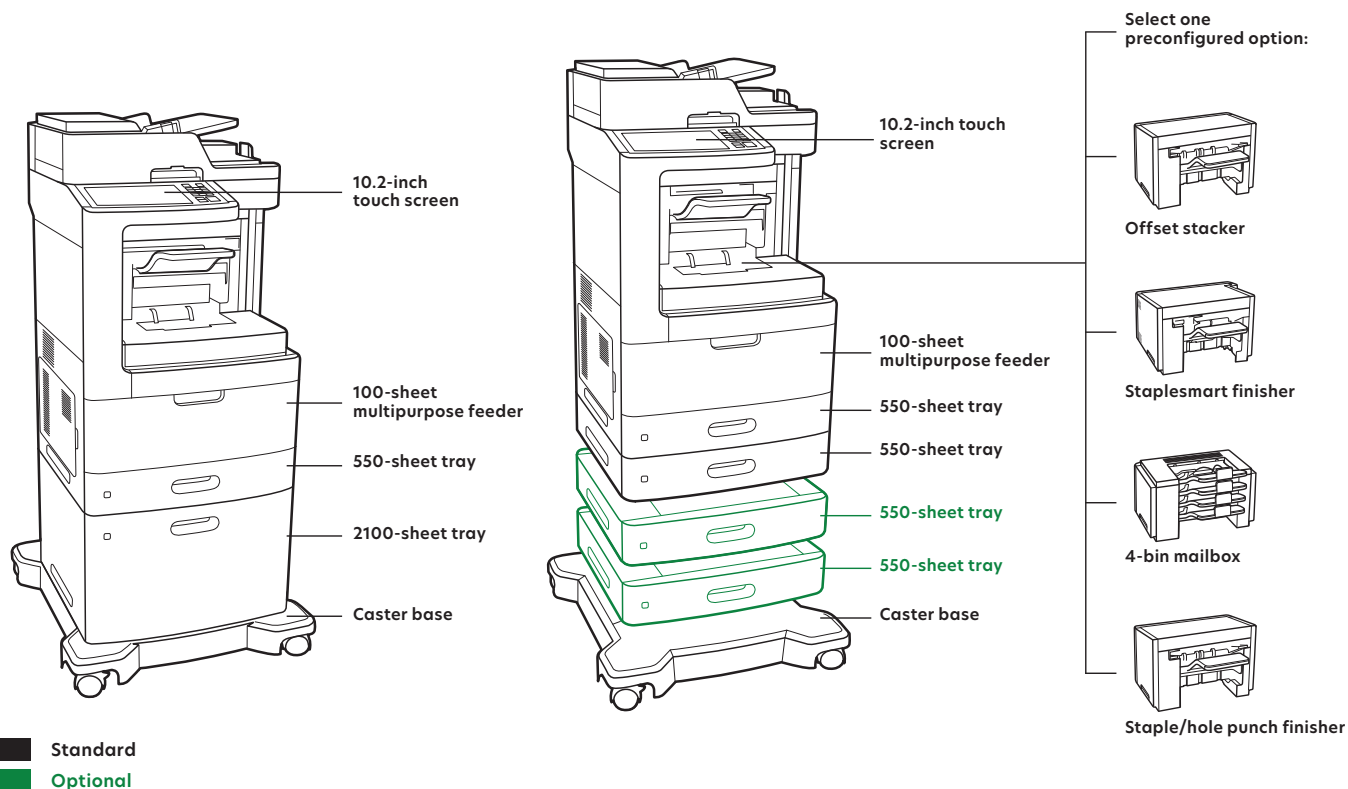

Lexmark XM7263 and XM7270 monochrome multifunction printer


Size (in. - H x W x D) / Weight (lb.)	44.6 x 26.1 x 28.9 in / 177.8 lb.
550-sheet tray	
Size (in. - H x W x D)	4.3 x 21.6 x 21.1 in.
Packaged size (in. - H x W x D)	8.2 x 24.4 x 24.1 in.
Weight (lb.)	15.4 lb.
Packaged weight (lb.)	20.1 lb.

Description	Part number
XM7263 base model	24T9403
XM7270 base model	24T9404
550-sheet tray	24T7300
2100-sheet tray	24T7350
Staple finisher	40G0850
4-bin mailbox	40G0852
Offset stacker	24T8999
Toner cartridge	24B6020
Imaging kit	24B6025
Staple cartridges (3-pack)	25A0013
Staple, hole punch finisher	40G0849

Notes :

- ▶ Input capacity
Standard: 1,200 sheets
Maximum: 2,300 sheets
- ▶ Output capacity
Standard: 1,050 sheets (950, mailbox)
Maximum: 1,050 sheets (950, mailbox)
- ▶ You must order an output option in addition to the base unit, along with any desired options
- ▶ Hard disk included in standard configuration
- ▶ DADF - Duplexing Automatic Document Feeder (scans both sides of paper in one pass)
- ▶ Maximum yield of cartridge that comes with the printer:
25K pages
- ▶ Maximum yield of after-market cartridge: 35K pages
- ▶ Staple cartridges contain 5K staples
 - ▶ Staples maximum of 50 sheets per set
 - ▶ Refill staple cartridges available in 3 pack
- ▶ Three-hole punch modes supported: 2-hole, 3-hole, 4-hole

The staple, hole punch finisher for select Lexmark monochrome models is an expanded version of the staple finisher. The staple, hole punch finisher includes all of the functionality of the staple finisher and adds the ability to apply a standard left page edge U.S. 3-hole pattern or European 2-hole or 4-hole pattern to all supported media (A4, Letter, Oficio and Folio).

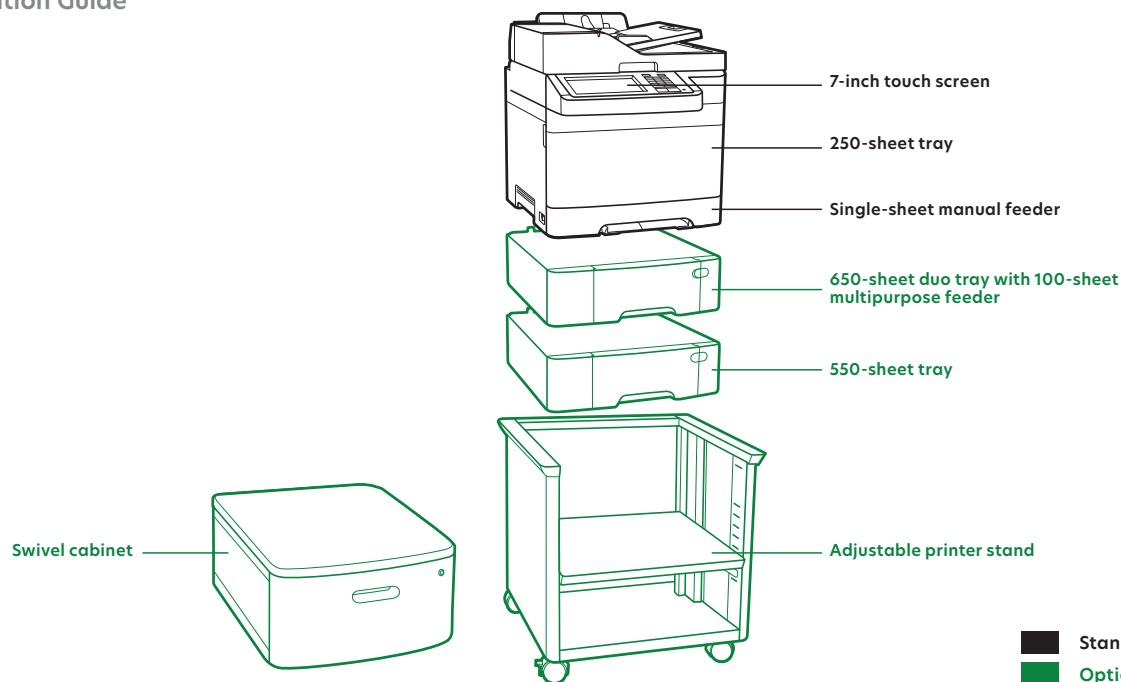


Lexmark XC2132 color multifunction printer

Size (in. - H x W x D) / Weight (lb.)	18.44 x 17.48 x 23.2 in. / 62 lb.
550-sheet duo tray with 100-sheet feeder:	
Size (in. - H x W x D)	5.2 x 16.7 x 16.4 in.
Packaged size (in. - H x W x D)	8.0 x 18.7 x 19.7 in.
Weight (lb.)	9.3 lb.
Packaged weight (lb.)	12.1 lb.
550-sheet tray:	
Size (in. - H x W x D)	5.2 x 16.7 x 16.4 in.
Packaged size (in. - H x W x D)	8.0 x 18.7 x 19.7 in.
Weight (lb.)	9.3 lb.
Packaged weight (lb.)	12.1 lb.
Adjustable printer stand:	
Size (in. - H x W x D)	23 x 23.5 x 23.5 in.
Packaged size (in. - H x W x D)	31.75 x 27.0 x 27.0 in.
Weight (lb.)	55 lb.
Packaged weight (lb.)	81 lb.
Swivel cabinet:	
Size (in. - H x W x D)	10.4 x 18.7 x 23.6 in.
Packaged size (in. - H x W x D)	14.50 x 27.25 x 23.25 in.
Weight (lb.)	48.0 lb.
Packaged weight (lb.)	57 lb.

Description	Part number
Base model	28E0600
650-sheet duo tray	38C0626
550-sheet tray	38C0636
Swivel cabinet	3073173
Adjustable printer stand	35S8502
Black cartridge	24B6011
Cyan cartridge	24B6008
Magenta cartridge	24B6009
Yellow cartridge	24B6010
Black & color imaging kit	70C0Z50
Black imaging kit	70C0Z10
Photoconductor kit	70C0P00

Notes :

- ▶ Input capacity
Standard: 250 sheets
Maximum: 1,450 sheets
- ▶ Output capacity
Standard: 150 sheets
Maximum: 150 sheets
- ▶ The hard disk comes with the printer
- ▶ The printer ships with cartridges maximum yield:
8K pages (black), 4K pages (color)
- ▶ After-market cartridges: 6K pages (black), 3K pages (color)

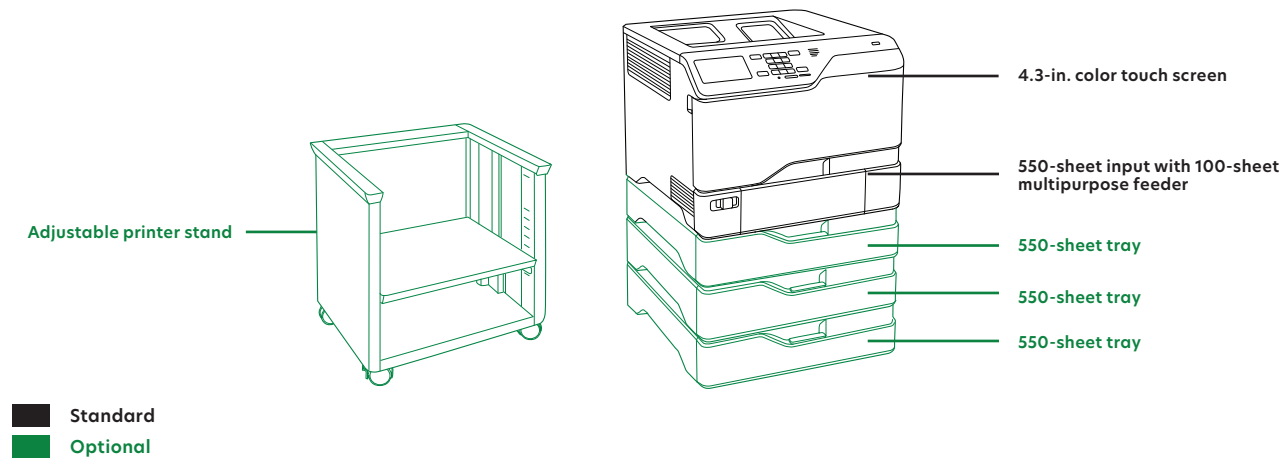

Lexmark C4150 color laser printer

Size (in. - H x W x D) / Weight (lb.)	16.4 x 18.7 x 19.5 in. / 80.5 lbs.
550-sheet tray:	
Size (in. - H x W x D)	4.7 x 18.23 x 19 in.
Weight (lb.)	15 lbs.
CS/CX72x series adjustable stand:	
Size (in. - H x W x D)	20.5 x 25.7 x 24.6 in.
Weight (lb.)	49.5 lbs.

Minimum operation clearance

The following clearances must be maintained for proper ventilation of the C4150

Top	254 mm
Left side	152 mm
Right side	508 mm
Rear	102 mm
Front	508 mm

Sources and capacities

Input sources¹	
Number of standard sources	2
Maximum number of optional trays	3
Maximum number of input sources ¹	5
Input capacities	
Standard trays	550
Multipurpose tray capacity	100
Total standard capacity	650
Maximum input capacity	2300
Output capacities²	
Standard output bin capacity (printer top)	300
Maximum output capacity	300
Duplex	
Standard internal duplex print	Yes

¹ 20 lb. xerographic paper at ambient environment

² Capacity may vary and is subject to media specifications and printer operating environment.


³ Capacity will vary with label material and construction.

⁴ Capacity will vary depending on weight and type of media

Description	Part number
Lexmark C4150	40C9054
Laser toner print cartridge	
C4150 black toner cartridge	24B6519
C4150 cyan toner cartridge	24B6516
C4150 magenta toner cartridge	24B6517
C4150 yellow toner cartridge	24B6518
Black return program imaging unit	74C0ZK0
Color (CMY) return program imaging kit	74C0ZV0
Waste toner bottle	74C0W00
Paper handling	
550-sheet tray	40C2100
Furniture	
Adjustable stand	40C2300

Input/output capacity by media and source

Media	Stack height	Approximate reference capacity
Input		
Plain paper ¹	59 mm	550 sheets (75 g/m ²)
Envelopes		50 envelopes (75 g/m ²)
Labels		200 labels ³
Plain paper ¹	59 mm	550 sheets (75 g/m ²)
Envelopes		50 envelopes (75 g/m ²)
Labels		200 labels ³
Plain paper	11 mm	100 sheets (75 g/m ²)
Envelopes		10 envelopes (75 g/m ²)
Other		Various quantities ⁴
Output		
Plain paper	~44 mm	300 sheets (75 g/m ²)
Envelopes		50 sheets (75 g/m ²)

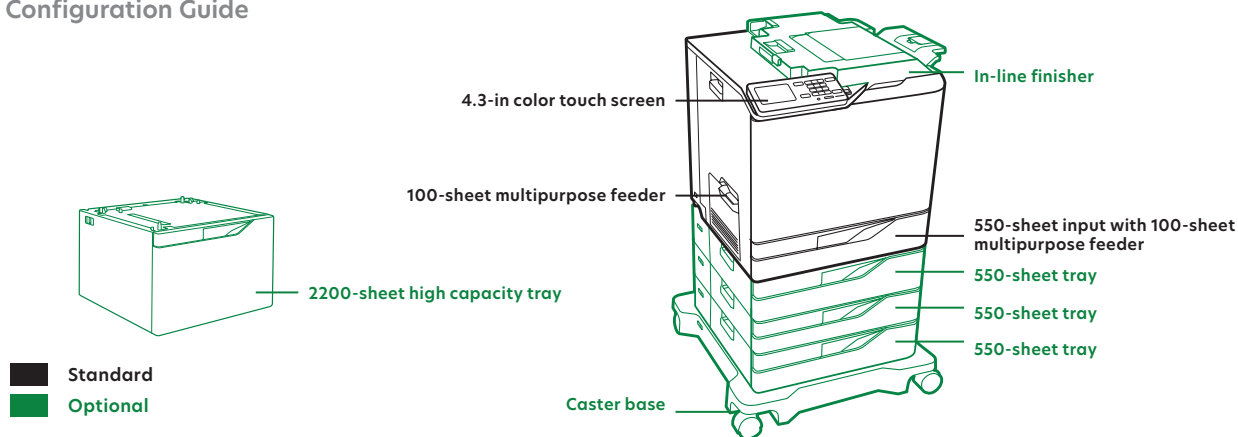

Lexmark C6160 color laser printer

Size (in. - H x W x D) / Weight (lb.)	21.12 x 22 x 20.6 in / 137 lbs.
550-sheet tray - installed:	
Size (in. - H x W x D)	4.72 x 22 x 20.6 in.
Weight (lb.)	20 lbs.
2200-sheet tray - installed:	
Size (in. - H x W x D)	14.13 x 22 x 20.6 in.
Weight (lb.)	46.6 lbs.
Caster base - installed	
Size (in. - H x W x D)	4.27 x 26.1 x 25.9 in.
Weight (lb.)	46 lbs.
Staple finisher - uninstalled	
Size (in. - H x W x D)	5.5 x 20.9 x 18.7 in.
Weight (lb.)	11.2 lbs.
Multiposition staple, hole punch finisher	
Size (in. - H x W x D)	45.5 x 24.5 x 22.6 in.
Weight (lb.)	120 lbs.
Multiposition staple, hole punch finisher tall	
Size (in. - H x W x D)	50.2 x 24.5 x 22.6 in.
Weight (lb.)	122.4 lbs.

Minimum clearance

The following clearances must be maintained for proper ventilation and operation of the C6160

Top	12 in / 305 mm
Left side	18 in / 457 mm
Right side	6 in / 152 mm
Rear	8 in / 203 mm
Front	15 in / 381 mm

Note: The above clearance values allow for opening the multipurpose feeder on the left side of the machine, lifting the scanner lid and opening the front door to change toner, developers, and photoconductor units.

Sources and capacities

Input sources	
Number of standard sources	2
Maximum number of optional trays	4
Maximum number of input sources ¹	6
Input capacities	
Input trays (550-sheets ea.)	550
Multipurpose tray capacity	100
Total standard capacity	650
Maximum input capacity	4500
Output capacities²	
Standard bin (printer top)	500
w/ staple finisher installed	300
Maximum output capacity	500

¹ Maximum of 4 optional input sources are supported at one time.

² Only one output option can be installed in the C6160

Description	Part number
Lexmark C6160	21K0300
550-sheet tray	21K0567
2200-sheet tray	21K0237
CS/CX820 staple finisher	42K2000
CX825/CX860 staple finisher	42K2300
Multiposition staple, hole punch finisher LV	42K1267
Multiposition staple, hole punch finisher HV	42K1268
Multiposition staple, hole punch finisher (tall) LV	42K1597
Multiposition staple, hole punch finisher (tall) HV	42K1598
320+GB Hard Disk Drive	27X0400
2GB DDR3 SO-DIMM (x64)	57X9022
256MB user flash	57X9801
Caster base	21K2501
CX82x/86x keyboard kit - English	57X7020
C6160 black toner cartridge	24B5998
C6160 cyan toner cartridge	24B5995
C6160 magenta toner cartridge	24B5996
C6160 yellow toner cartridge	24B5997
Photoconductor 1 pack	72K0P00
Photoconductor 3 pack	72K0Q00
Staple cartridges (3 pack)	25A0013
Waste toner bottle	72K0W00

Input/output capacity by media and source

Source	Media	Stack height	Approximate reference capacity
Input			
Standard 550-sheet tray ^b and optional 550-sheet tray ^b	Plain paper ^a	59 mm	550 sheets (75 g/m ²)
	Labels		200 labels ^c
Optional 2200-sheet tray ^b	Plain paper ^a	236 mm	2200 sheets (75 g/m ²)
	Labels		800 labels ^c
Multipurpose tray ^b	Plain paper ^a	11 mm	100 sheets (75 g/m ²)
	Envelopes		10 envelopes (75 g/m ²)
	Other		Various quantities ^d
Output			
Standard 500-sheet bin ^{a,b}	Plain paper ^a	68 mm	500 sheets (75g/m ²)
	Labels		200 labels ^c
	Envelopes		50 envelopes (75 g/m ²)
Standard bin with optional staple finisher installed ^{a,b}	Plain paper ^a	39 mm	300 sheets (75g/m ²)
	Labels		120 labels ^c
	Envelopes		30 envelopes (75 g/m ²)
Optional staple finisher ^{a,b}	Plain paper ^a (stapled sheets)	39 mm	300 sheets (75 g/m ²)
Optional multiposition staple, hole punch finisher ^{a,b}	Total output capacity	N/A	1950 sheets (75g/ m ²)
	Standard bin plain paper	70 mm	600 sheets (75g/m ²)
	Mailbox bins (2) plain paper	22 mm	125 sheets (75 g/m ²)/bin (250 sheets total)
	Staple bin plain paper	142 mm	1100 sheets (75g/m2)

^a 20 lb. xerographic paper at ambient environment

^b Capacity may vary and is subject to media specifications and printer operating environment.


^c Capacity will vary with label material and construction.

^d Capacity will vary depending on weight and type of media.

^e Stack height will not reach maximum due to weight of envelopes on one side of option tray causing tilt in tray.

^f This is an estimate based on the capacity of the standard 500-sheet output bin



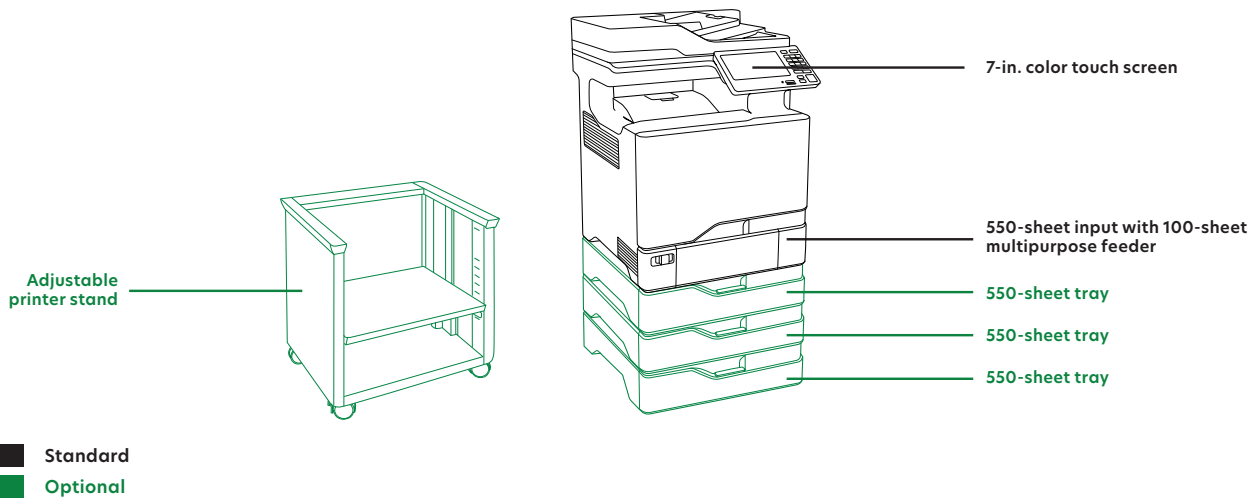

Lexmark XC4140/4150 color laser printer

Size (in. - H x W x D) / Weight (lb.)	22.5 x 19.9 x 21 in. / 101 lbs.
550-sheet tray:	
Size (in. - H x W x D)	4.7 x 18.23 x 19 in.
Weight (lb.)	15 lbs.
Adjustable stand - installed:	
Size (in. - H x W x D)	20.5 x 25.7 x 24.6 in.
Weight (lb.)	49.5 lbs.

Minimum operation clearance

The following clearances must be maintained for proper ventilation of the XC4140/XC4150

Top	291.7 mm
Left side	152 mm
Right side	508 mm
Rear	102 mm
Front	508 mm

Note: the above clearance values are for the most compact operating configuration of the product. Additional clearance (especially from the front) will usually be needed to utilize the multipurpose feeder, clear misfeeds, lift the scanner lid and to change toner and imaging units.

Sources and capacities

Input sources ¹	
Number of standard sources	2
Maximum number of optional trays	3
Maximum number of input sources ¹	5
Input capacities	
Standard trays	550
Multipurpose tray capacity	100
Total standard capacity	650
Maximum input capacity	2300
Output capacities ²	
Standard output bin capacity (printer top)	300
Maximum output capacity	300
Duplex	
Standard internal duplex print	Yes

¹ Maximum of 3 optional input sources are supported at one time.

² Assuming .20 lb. xerographic paper at ambient environment.

Description	Part number
Lexmark XC4140	40C9720
Lexmark XC4150	40C9611
550-sheet tray	40C2100
2GB DDR3, G2, 512Mx32, 204 SODIMM	57X9020
256MB user flash memory	57X9801
Hard Disk Drive	27X0400
Adjustable stand	40C2300
XC4150 black toner cartridge	24B6720
XC4150 cyan toner cartridge	24B6717
XC4150 magenta toner cartridge	24B6718
XC4150 yellow toner cartridge	24B6719
Black return program imaging unit	74C0ZK0
Color (CMY) return program imaging kit	74C0ZV0
Waste toner bottle	74C0W00

Notes:

The XC4140 does not come standard with a Hard Drive and does not include AccuRead OCR as a standard embedded solution. The XC4140 is a 40 ppm mono MFP.

The XC4150 has a Hard Drive in the standard configuration and has AccuRead OCR as a standard embedded solution. The XC4150 is a 50 ppm mono MFP.

Input/output capacity by media and source


Source	Media	Stack height	Approximate reference capacity
Input			
Standard 550-sheet tray ²	Plain paper ¹	59 mm	550 sheets (75 g/m ²)
	Envelopes		50 envelopes (75 g/m ²)
	Labels		200 labels ³
Optional 550-sheet tray ²	Plain paper ¹	59 mm	550 sheets (75 g/m ²)
	Labels		50 envelopes (75 g/m ²)
	Labels		200 labels ³
Multipurpose tray ^b	Plain paper	11 mm	100 sheets (75 g/m ²)
	Envelopes		10 envelopes (75 g/m ²)
	Other		Various quantities ⁴
Output			
Standard output bin ^{1,2}	Plain paper	~44 mm	300 sheets (75 g/m ²)
	Envelopes		50 sheets (75 g/m ²)

¹ 20 lb. xerographic paper at ambient environment

² Capacity may vary and is subject to media specifications and printer operating environment.

³ Capacity will vary with label material and construction.

⁴ Capacity will vary depending on weight and type of media.

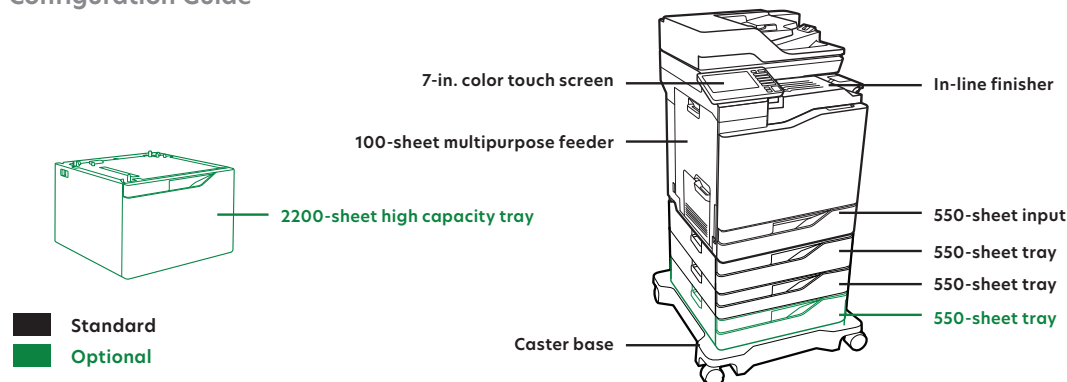

Lexmark XC6152 color laser printer

Size (in. - H x W x D) / Weight (lb.)	44.8 x 25.54 x 23.15 in. / 323 lbs.
550-sheet tray - installed:	
Size (in. - H x W x D)	4.72 x 22 x 20.6 in.
Weight (lb.)	20 lbs.
2200-sheet tray - installed:	
Size (in. - H x W x D)	14.13 x 22 x 20.6 in.
Weight (lb.)	46.6 lbs.
Caster base - installed	
Size (in. - H x W x D)	4.27 x 26.1 x 25.9 in.
Weight (lb.)	46 lbs.
Staple finisher - uninstalled	
Size (in. - H x W x D)	5.5 x 20.9 x 18.7 in.
Weight (lb.)	11.2 lbs.
Multiposition staple, hole punch finisher	
Size (in. - H x W x D)	45.5 x 24.5 x 22.6 in.
Weight (lb.)	120 lbs.
Multiposition staple, hole punch finisher tall	
Size (in. - H x W x D)	50.2 x 24.5 x 22.6 in.
Weight (lb.)	122.4 lbs.

Minimum clearance

The following clearances must be maintained for proper ventilation and operation of the XC6152

Top	13 in / 330 mm
Left side	18 in / 457 mm
Right side	6 in / 152 mm
Rear	8 in / 203 mm
Front	15 in / 381 mm

Note: The above clearance values allow for opening the multipurpose feeder on the left side of the machine, lifting the scanner lid and opening the front door to change toner, developers, and photoconductor units.

Sources and capacities

Input sources¹	
Number of standard sources	4
Maximum number of optional trays	4
Maximum number of input sources ¹	6
Input capacities	
Input trays (550-sheets ea.)	1650
Multipurpose tray capacity	100
Total standard capacity	1750
Maximum input capacity	4500
Output capacities²	
Standard output bin capacity (printer top)	300
Standard bin capacity w/staple finisher	300
Staple, hole punch finisher - unstapled	N/A
Maximum output capacity	300

¹ Maximum of 4 optional input sources are supported at one time.

² Only one output option can be installed.

³ Maximum output capacity requires installation of the multiposition staple, hole punch finisher.

Description	Part number
Lexmark XC6152	42K1212
550-sheet tray	21K0567
2200-sheet tray	21K0237
XC6152 staple finisher	42K2000
320+GB Hard Disk Drive ^a	27X0400
2GB DDR3 SO-DIMM (x64)	57X9022
256MB user flash	57X9801
Caster base ^a	21K2501
XC6152 keyboard kit - English	57X7020
XC6152, XC8155 black toner cartridge	24B6511
XC6152, XC8155 cyan toner cartridge	24B6508
XC6152, XC8155 magenta toner cartridge	24B6509
XC6152, XC8155 yellow toner cartridge	24B6510
Photoconductor 1 pack	72K0P00
Photoconductor 3 pack	72K0Q00
Staple cartridges (3 pack)	25A0013
Waste toner bottle	72K0W00

^a Included in standard configuration

Input/output capacity by media and source

Source	Media	Stack height	Approximate reference capacity
Input			
Standard 550-sheet tray ^b and optional 550-sheet tray ^b	Plain paper ^a	59 mm	550 sheets (75 g/m ²)
	Labels		200 labels ^c
Optional 2200-sheet tray ^b	Plain paper ^a	236 mm	2200 sheets (75 g/m ²)
	Labels		800 labels ^c
Multipurpose tray ^b	Plain paper ^a	11 mm	100 sheets (75 g/m ²)
	Envelopes		10 envelopes (75 g/m ²)
	Other		Various quantities ^d
Output			
Standard 500-sheet bin ^{a,b}	Plain paper ^a	68 mm	500 sheets (75g/m ²)
	Labels		200 labels ^c
	Envelopes		50 envelopes (75 g/m ²)
Standard bin with optional staple finisher installed ^{a,b}	Plain paper ^a	39 mm	300 sheets (75g/m ²)
	Labels		120 labels ^c
	Envelopes		30 envelopes (75 g/m ²)
Optional staple finisher ^{a,b}	Plain paper ^a (stapled sheets)	39 mm	300 sheets (75 g/m ²)
Optional multiposition staple, hole punch finisher ^{a,b}	Total output capacity	N/A	1950 sheets (75g/ m ²)
	Standard bin plain paper	70 mm	600 sheets (75g/m ²)
	Mailbox bins (2) plain paper	22 mm	125 sheets (75 g/m ²)/bin (250 sheets total)
	Staple bin plain paper	142 mm	1100 sheets (75g/m2)

^a 20 lb. xerographic paper at ambient environment

^b Capacity may vary and is subject to media specifications and printer operating environment.



^c Capacity will vary with label material and construction.

^d Capacity will vary depending on weight and type of media.

^e Stack height will not reach maximum due to weight of envelopes on one side of option tray causing tilt in tray.

^f This is an estimate based on the capacity of the standard 500-sheet output bin

Configuration Guide

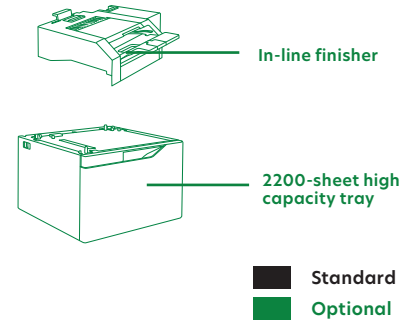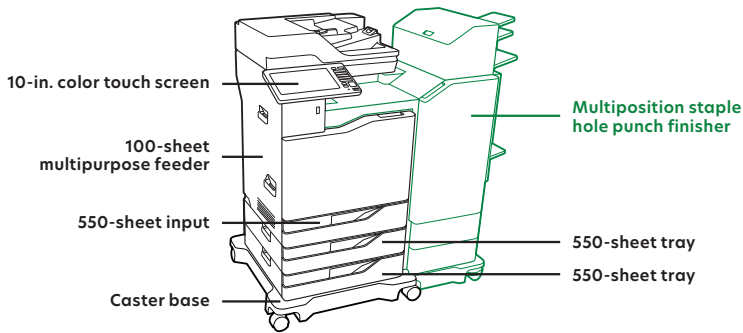

Standard
Optional

Lexmark XC8155 color multifunction device

Size (in. - H x W x D) / Weight (lb.)	36.7 x 22 x 23.15 in / 315 lbs.
550-sheet tray - installed:	
Size (in. - H x W x D)	4.72 x 22 x 20.6 in.
Weight (lb.)	20 lbs.
2200-sheet tray - installed:	
Size (in. - H x W x D)	14.13 x 22 x 20.6 in.
Weight (lb.)	46.6 lbs.
Caster base - installed	
Size (in. - H x W x D)	4.27 x 26.1 x 25.9 in.
Weight (lb.)	46 lbs.
Staple finisher - uninstalled	
Size (in. - H x W x D)	6.3 x 21.4 x 18.7 in.
Weight (lb.)	13.4 lbs.
Multiposition staple, hole punch finisher	
Size (in. - H x W x D)	45.5 x 24.5 x 22.6 in.
Weight (lb.)	120 lbs.
Multiposition staple, hole punch finisher tall	
Size (in. - H x W x D)	50.2 x 24.5 x 22.6 in.
Weight (lb.)	122.4 lbs.

Minimum clearance

The following clearances must be maintained for proper ventilation and operation of the XC8155

Top	13in / 330 mm
Left side	18 in / 457 mm
Right side	6 in / 152 mm
Rear	8 in / 203 mm
Front	15 in / 381 mm

Note: The above clearance values allow for opening the multipurpose feeder on the left side of the machine, lifting the scanner lid and opening the front door to change toner, developers, and photoconductor units.

Sources and capacities

Input sources ¹	
Number of standard sources	4
Maximum number of optional trays	4
Maximum number of input sources ¹	6
Input capacities	
Input trays (550-sheets ea.)	1650
Multipurpose tray capacity	100
Total standard capacity	1750
Maximum input capacity	4500*
Output capacities ²	
Standard output bin capacity (printer top)	500
Standard bin capacity w/staple finisher	300
Staple, hole punch finisher - unstapled	1950 ³
Maximum output capacity	1950 ³

¹ Maximum of 4 optional input sources are supported at one time.

² Only one output option can be installed.

³ Maximum output capacity requires installation of the multiposition staple, hole punch finisher.

* In order to achieve maximum input capacity of 4500 sheets, add (1) 550-sheet tray and (1) 2200-sheet high capacity tray. With this configuration, the device is extremely tall and the tall finisher will not work. The in-line finisher will still work in this configuration since it fits under the scanner.

Description	Part number
Lexmark XC8155	42K1241
550-sheet tray ^a	21K0567
2200-sheet tray ^b	21K0237
320+GB Hard Disk Drive ^c	27X0400
XC8155 staple finisher	42K2300
Multiposition staple, hole punch finisher (short) ^d	42K1267
Multiposition staple, hole punch finisher (tall) ^e	42K1598
256MB user flash	57X9801
Caster base ^c	21K2501
XC8155 keyboard kit - English	57X7020
XC6152, XC8155 black toner cartridge	24B6511
XC6152, XC8155 cyan toner cartridge	24B6508
XC6152, XC8155 magenta toner cartridge	24B6509
XC6152, XC8155 yellow toner cartridge	24B6510
Photoconductor 1 pack	72K0P00
Photoconductor 3 pack	72K0Q00
Waste toner bottle	72K0W00
Staple cartridges (3 pack)	25A0013

^a You may only add one additional tray to the standard configuration. When adding the 4th tray, you will need to use the tall finisher for finishing capabilities.

^b In order to use the 2200-sheet tray, remove two of the drawers from the standard configuration. For finishing capabilities, you will need the tall finisher with this configuration.

^c Included in standard configuration

^d Finisher for use with the standard configuration with 3 drawers.

^e This version of the finisher needed if you augment the standard configuration. Example 1: If you remove 2 drawers from the standard configuration and add the high capacity tray, you will need the tall finisher. Example 2: If you add an additional drawer to the standard configuration for a total of 4 drawers, you need the tall finisher.

Input/output capacity by media and source

Source	Media	Stack height	Approximate reference capacity
Input			
Standard 550-sheet tray ^b and optional 550-sheet tray ^b	Plain paper ^a	59 mm	550 sheets (75 g/m ²)
	Labels		200 labels ^c
Optional 2200-sheet tray ^b	Plain paper ^a	236 mm	2200 sheets (75 g/m ²)
	Labels		800 labels ^c
Multipurpose tray ^b	Plain paper ^a	11 mm	100 sheets (75 g/m ²)
	Envelopes		10 envelopes (75 g/m ²)
	Other		Various quantities ^d
Output			
Standard 500-sheet bin ^{a,b}	Plain paper ^a	68 mm	500 sheets (75g/m ²)
	Labels		200 labels ^c
	Envelopes		50 envelopes (75 g/m ²)
Standard bin with optional staple finisher installed ^{a,b}	Plain paper ^a	39 mm	300 sheets (75g/m ²)
	Labels		120 labels ^c
	Envelopes		30 envelopes (75 g/m ²)
Optional staple finisher ^{a,b}	Plain paper ^a (stapled sheets)	39 mm	300 sheets (75 g/m ²)
Optional multiposition staple, hole punch finisher ^{a,b}	Total output capacity	N/A	1950 sheets (75g/ m ²)
	Standard bin plain paper	70 mm	600 sheets (75g/m ²)
	Mailbox bins (2) plain paper	22 mm	125 sheets (75 g/m ²)/bin (250 sheets total)
	Staple bin plain paper	142 mm	1100 sheets (75g/m2)

^a 20 lb. xerographic paper at ambient environment

^b Capacity may vary and is subject to media specifications and printer operating environment.

^c Capacity will vary with label material and construction.

^d Capacity will vary depending on weight and type of media.



^e Stack height will not reach maximum due to weight of envelopes on one side of option tray causing tilt in tray.

^f This is an estimate based on the capacity of the standard 500-sheet output bin



partnernetwork.lexmark.com

Configuration Guide

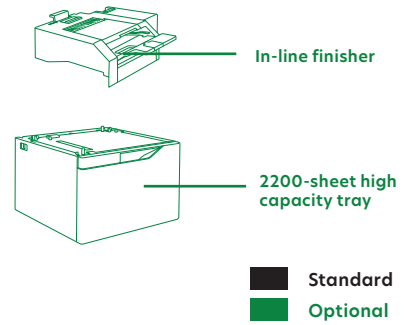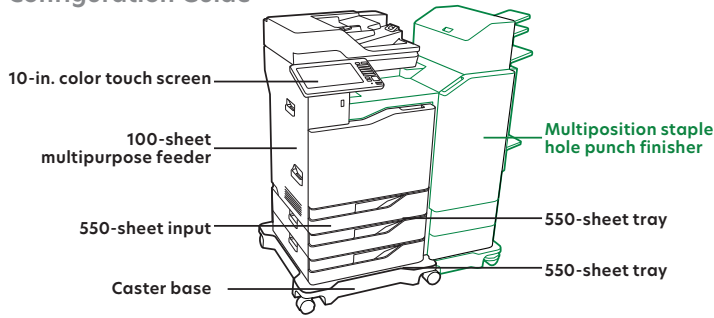

Lexmark XC8160 color multifunction device

Size (in. - H x W x D) / Weight (lb.)	36.7 x 22 x 23.15 in. / 315 lbs.
550-sheet tray - installed:	
Size (in. - H x W x D)	4.72 x 22 x 20.6 in.
Weight (lb.)	20 lbs.
2200-sheet tray - installed:	
Size (in. - H x W x D)	14.13 x 22 x 20.6 in.
Weight (lb.)	46.6 lbs.
Caster base - installed	
Size (in. - H x W x D)	4.27 x 26.1 x 25.9 in.
Weight (lb.)	46 lbs.
Staple finisher - uninstalled	
Size (in. - H x W x D)	6.3 x 21.4 x 18.7 in.
Weight (lb.)	13.4 lbs.
Multiposition staple, hole punch finisher	
Size (in. - H x W x D)	45.5 x 24.5 x 22.6 in.
Weight (lb.)	120 lbs.
Multiposition staple, hole punch finisher tall	
Size (in. - H x W x D)	50.2 x 24.5 x 22.6 in.
Weight (lb.)	122.4 lbs.

Minimum clearance

The following clearances must be maintained for proper ventilation and operation of the XC8160

Top	13 in / 330 mm
Left side	18 in / 457 mm
Right side	6 in / 152 mm
Rear	8 in / 203 mm
Front	15 in / 381 mm

Note: The above clearance values allow for opening the multipurpose feeder on the left side of the machine, lifting the scanner lid and opening the front door to change toner, developers, and photoconductor units.

Sources and capacities

Input sources¹	
Number of standard sources	4
Maximum number of optional trays	4
Maximum number of input sources ¹	6
Input capacities	
Input trays (550-sheets ea.)	1650
Multipurpose tray capacity	100
Total standard capacity	1750
Maximum input capacity	4500*
Output capacities²	
Standard output bin capacity (printer top)	500
Standard bin capacity w/staple finisher	300
Staple, hole punch finisher - unstapled	1950 ³
Maximum output capacity	1950 ³

¹ Maximum of 4 optional input sources are supported at one time.

² Only one output option can be installed.

³ Maximum output capacity requires installation of the multiposition staple, hole punch finisher.

* In order to achieve maximum input capacity of 4500 sheets, add (1) 550-sheet tray and (1) 2200-sheet high capacity tray. With this configuration, the device is extremely tall and the tall finisher will not work. The in-line finisher will still work in this configuration since it fits under the scanner.

Description	Part number
Lexmark XC8160	42K1271
550-sheet tray ^a	21K0567
2200-sheet tray ^b	21K0237
320+GB Hard Disk Drive ^c	27X0400
XC8160 staple finisher	42K2300
Multiposition staple, hole punch finisher (short) ^d	42K1267
Multiposition staple, hole punch finisher (tall) ^e	42K1598
256MB user flash	57X9801
Caster base ^c	21K2501
XC8155 keyboard kit - English	57X7020
XC8160 black toner cartridge	24B6515
XC8160 cyan toner cartridge	24B6512
XC8160 magenta toner cartridge	24B6513
XC8160 yellow toner cartridge	24B6514
Photoconductor 1 pack	72K0P00
Photoconductor 3 pack	72K0Q00
Waste toner bottle	72K0W00
Staple cartridges (3 pack)	25A0013

^a You may only add one additional tray to the standard configuration. When adding the 4th tray, you will need to use the tall finisher for finishing capabilities.

^b In order to use the 2200-sheet tray, remove two of the drawers from the standard configuration. For finishing capabilities, you will need the tall finisher with this configuration.

^c Included in standard configuration

^d Finisher for use with the standard configuration with 3 drawers.

^e This version of the finisher needed if you augment the standard configuration. Example 1: If you remove 2 drawers from the standard configuration and add the high capacity tray, you will need the tall finisher. Example 2: If you add an additional drawer to the standard configuration for a total of 4 drawers, you need the tall finisher.

Input/output capacity by media and source

Source	Media	Stack height	Approximate reference capacity
Input			
Standard 550-sheet tray ^b and optional 550-sheet tray ^b	Plain paper ^a	59 mm	550 sheets (75 g/m ²)
	Labels		200 labels ^c
Optional 2200-sheet tray ^b	Plain paper ^a	236 mm	2200 sheets (75 g/m ²)
	Labels		800 labels ^c
Multipurpose tray ^b	Plain paper ^a	11 mm	100 sheets (75 g/m ²)
	Envelopes		10 envelopes (75 g/m ²)
	Other		Various quantities ^d
Output			
Standard 500-sheet bin ^{a,b}	Plain paper ^a	68 mm	500 sheets (75g/m ²)
	Labels		200 labels ^c
	Envelopes		50 envelopes (75 g/m ²)
Standard bin with optional staple finisher installed ^{a,b}	Plain paper ^a	39 mm	300 sheets (75g/m ²)
	Labels		120 labels ^c
	Envelopes		30 envelopes (75 g/m ²)
Optional staple finisher ^{a,b}	Plain paper ^a (stapled sheets)	39 mm	300 sheets (75 g/m ²)
Optional multiposition staple, hole punch finisher ^{a,b}	Total output capacity	N/A	1950 sheets (75g/ m ²)
	Standard bin plain paper	70 mm	600 sheets (75g/m ²)
	Mailbox bins (2) plain paper	22 mm	125 sheets (75 g/m ²)/bin (250 sheets total)
	Staple bin plain paper	142 mm	1100 sheets (75g/m2)

^a 20 lb. xerographic paper at ambient environment

^b Capacity may vary and is subject to media specifications and printer operating environment.

^c Capacity will vary with label material and construction.

^d Capacity will vary depending on weight and type of media.

^e Stack height will not reach maximum due to weight of envelopes on one side of option tray causing tilt in tray.

^f This is an estimate based on the capacity of the standard 500-sheet output bin