



**CF**



**AF/FC1**

**Access, Opt.fibre, Focaliser CV/CB1**  
**PLASTIC OPTICAL FIBRES**

## OVERVIEW

- Wide range of models: ultra slim for small object, long distances, spiral tube for handling
- Wide range of flexible fibre heads (with sleeve)
- Wide range of cutting fibre units
- P67 protection degree
- SSF – FS1 – FX3 – FX4 series connectable
- Approvals: CE



## TECHNICAL FEATURES

### Detection properties

|                   |       |
|-------------------|-------|
| Distance with SSF | 25 mm |
| Distance with FS1 | 25 mm |
| Distance with FX3 | 30 mm |
| Distance with FX4 | 30 mm |

### Application

|                    |           |
|--------------------|-----------|
| Function Principle | Scanner   |
| Fibre model        | CV/CB1-** |

Mechanical data

|                       |                            |
|-----------------------|----------------------------|
| Material              | glass, nickel plated brass |
| Operating temperature | -40°C....+125°C            |
| Ø optical fibre core  | 1                          |
| Head shape            | Ø 6,5 mm                   |
| thread                | M4                         |

Test/Approvals



|                      |                |
|----------------------|----------------|
| Degree of protection | IP67 (EN60529) |
|----------------------|----------------|

Generical Data

|                       |                 |
|-----------------------|-----------------|
| Operating Temperature | -40°C....+125°C |
| Mechanical Protection | IP67 (EN60529)  |

# OTHERS

Dimensions

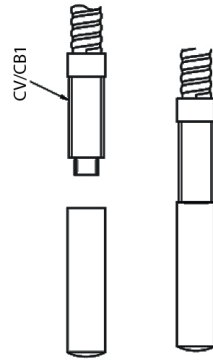

## Datasensing S.r.l.

Strada S.Caterina, 235  
41122 Modena (MO)  
Tel. 059 420411  
Fax 059 253973  
E-mail  
info@datasensing.com

**date of  
printing**  
25/10/2026  
03:56:05