



UR+DG

URA/TA

Photo.Maxi,Relay-NO/NC,Ampli 24Vdc
CONTROL UNIT FOR MINIATURIZED SENSORS WITH
MINIATURE PHOTOELECTRIC SENSORS

OVERVIEW

- The unit allows the mounting of miniature pair of sensors suitable for very harsh environments (DG series)
- LED indicators: alignment (stability), operating voltage, alarm and output state
- Operating voltage AC or DC
- Relay output and relay alarm output
- Double timer with independent adjustments
- Sensitivity adjustment
- Possibility of mounting on panel
- IP68 photoelectric sensors for applications in harsh environment
- Sensing distance 60 m (HI), 30 m (LO)
- Approvals: CE



TECHNICAL FEATURES

Outputs

Switching frequency	10Hz
---------------------	------

Electrical data

Operating Voltage	24Vdc
-------------------	-------

No-Load supply current	$\leq 100\text{mA}$
------------------------	---------------------

Max ripple content	≤ 10%
LED indicators	green (supply) red (output state) green (stability) red (alarm)
Max output voltage	250V
Max output current	3A
Timer functions	yes
Operating time (relè de-energized)	≤ 40ms
Reset time (relè energized)	≤ 40ms
Voltage tolerance	± 20%
Operating output	Relay NO+NC
Alarm output	relay NO
Relay with alarm output	yes

Mechanical data

Dimensions	36x90x67mmù
Housing material	Noryl 90 V-0
Weight	110g
Operating temperature	-10°C ... +50°C (without freeze)


Test/Approvals

Approvals	CE
-----------	----

EMC compatibility	Conforming with EMC directive according with EN60947-5-2
Degree of protection	IP20
Generical Data	
Dimensions	36x90x67mmù
Operating Temperature	-10°C ... +50°C (without freeze)
Mechanical Protection	IP20


CONNECTIONS

Eletrical diagram

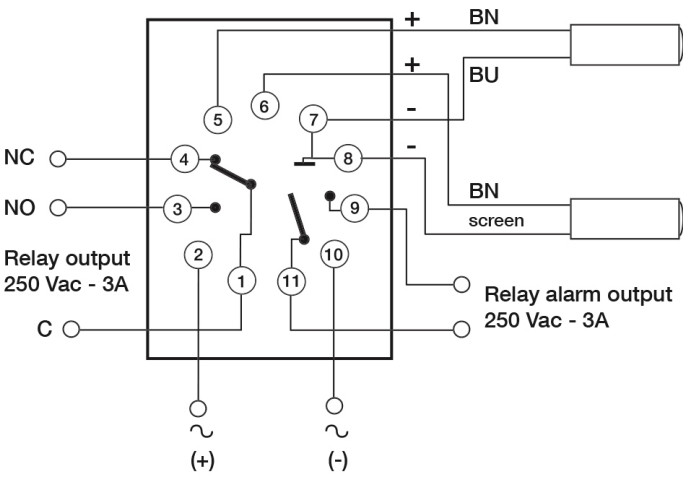

OTHERS

Dimensions

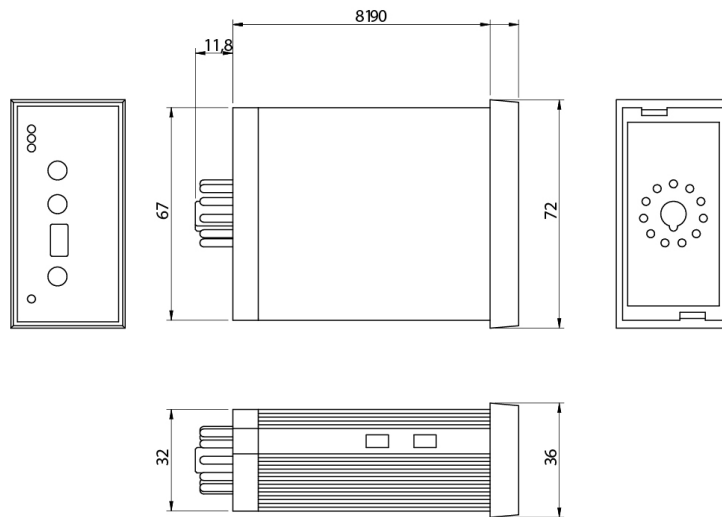

Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

**date of
printing**
25/10/2026
04:02:51