


3rd party accessories

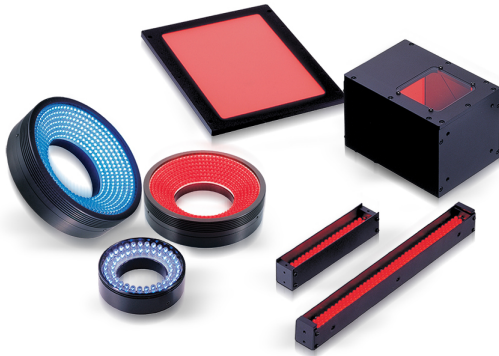

933-56-027

Lens, Mounting Clamp for 933-55-348 and
933-58-259

VISION PROCESSORS

OVERVIEW

- Multi-camera vision processors
- GigE Vision standard connectivity
- 8 USB 3.0 ports for connecting external devices (i.e keyboard and mouse)
- Windows 10 IoT Enterprise®

TECHNICAL FEATURES

Application

Description

Accessory lens

Generical Data

CPU	Intel® Core i7-7700T up to 3.80 Ghz – quad core
System Memory	32 GB DDR4 RAM
Storage	128 GB SATA SSD
Graphics	Intel® HD Graphics 630 (1920 x 1200 resolution) - VGA, DVI
Camera Interface	2x, 4x or 8x - 1000 Mbps Base-T, PoE camera ports (Up to 7W per channel)

Network Interface	2x LAN ports - 10/100/1000 Mbps Base-T
Serial Communications	2x RS-232 serial port
Keyboard/Mouse	8x USB 3.0 ports
Comm Connectivity	Supports EtherNet/IP, Profinet, Modbus TCP and OPC
I/O	16 in-16 out - single I/O; card configurable PNP/NPN
Operating System	Windows 10 IoT Enterprise
Power Requirements	24 VDC +/- 25% (5.5 A @ 24 VDC)
Dimensions	145 (H) x 192 (W) x 230 (D) mm 5.7 (H) x 7.56 (W) x 9.05 (D) in.
Operating Temperature	0 to +50 °C / +32 to +122 °F
Humidity	5 to 95% (non-condensing)
Mechanical Protection	IP20
Certifications (Safety Compliance)	CE/FCC, c-UL-us, KCC